



COOL TOP

Ultra cool non-metal roofing solution

Up to 50%
COOLER THAN
TRADITIONAL
METAL

MODERN
COLOURS

DURABLE
& STRONG
- HAIL
RESISTANT

RUST
PROOF

LONG SERVICE
LIFETIME


Introducing.... **SUNTUF COOL TOP**

Yet another innovative idea & design
from the manufacturers of **SUNTUF**




SUNTUF COOL TOP Features

- * Ultra Cool
- * Durable & Strong
- * Hail resistant
- * 50% Cooler than traditional metal
- * Cool colours
- * Flexible
- * Easy on the family budget
- * Longlife
- * No rust problems
- * Be comfortable

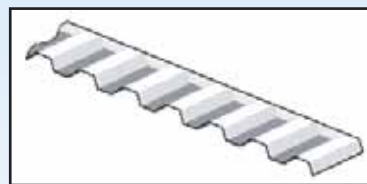

Greca

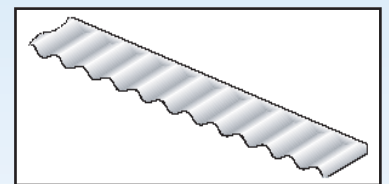

Corrugated

An Australian owned product
for Australian conditions
....Now that's Cool!

INSTALLATION

CUTTING - Sheets should be cut using a circular saw with a masonry blade or a fine tooth metal blade at low speeds. In addition, shears or a sharp knife may be used depending on sheeting thickness.

DRILLING - Screw holes should be pre-drilled with a 10mm metal drill bit at low speeds to compensate for expansion. (12mm for sheets longer than 6 metres.)

OVERLAPPING - Side laps should be 1.5 corrugations (166mm) for Corrugated and 1 corrugation for Greca. If overlapping is required in the sheet length we recommend a minimum of 200mm for roofs and 100mm for walls. We recommend the use of a compressible foam along the fastener line for roof slopes of less than 10 degrees.

SKYLIGHTS - Suntuf polycarbonate sheets are manufactured to enable light transmitting panels to be easily incorporated for either roof or wall applications.


FASTENING - Use 50mm fixings through the crest. Fix top and bottom of sheet every 2nd corrugation and in the centre of every 3rd corrugation. Can also be fitted with 30mm fixings through the valley for wall applications.



TECHNICAL INFORMATION

- Lightweight
- Easy to install
- 99.9% UV resistant, meets AS2376-1980 Australian Standards
- Hail, impact resistant, passed AS/NZS1562.3:1996 sand bag test
- Chemical resistant
- Fire resistant, has a class 1 rating, meets AS1530-3
- Economical
- Totally Glare free
- Energy efficient
- Suntuf products have been proven in Australian conditions for over 15 years

Go for a lifestyle change!

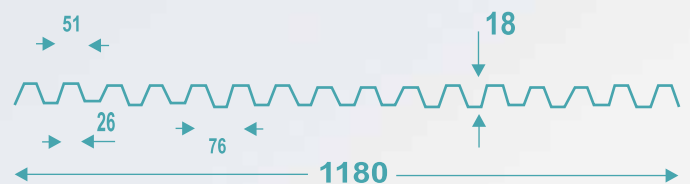

Available in Corrugated and Greca profiles

Profile	Overall Width	Cover Width	Thickness	Profile Height	Colour	Min/ Cold Curving Radius	Max. Overhang	Max. End Spans	Max. Mid Spans
Corrugated	860	760	1.3mm	17mm	White & Beige	6000mm	50mm	800mm	1000mm
Greca	1180	1064	1.3mm	18mm	White & Beige	6000mm	50mm	800mm	1000mm



Your COOL TOP Agent:

Polycarbonate Roofing
 65 Steel St Capalaba Qld 4157
 Ph 07 3245 1301 Fax 07 3245 1354
www.polycarbonate.com.au
sales@polycarbonate.com.au

Warranty

No breakage shall occur as a direct result of solar radiation or the impact of hail (measuring up to 25mm in diameter with a velocity of up to 100kph as per ASTM E822-81) or other normal weather conditions. Warranty applies only when fitted in accordance with installation information. Please retain receipt as proof of purchase for any warranty claims. Full warranty details are available on request.