



Installation Guide

Easy to follow instructions make your project a success



Australia's highest performing polycarbonate roofing




Bayer MaterialScience

*Refer to full warranty terms & conditions.

step 1

Purlins & accessories

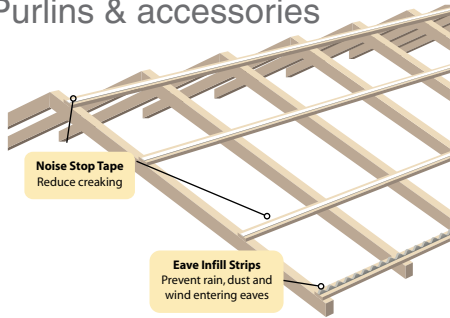

1. Ensure that your roof pitch is at least 5°, ie. 88mm rise per lineal metre. This will ensure adequate water run off.



2. Allow for ventilation, particularly at the highest point, to minimise heat build-up and provide air circulation. Good ventilation will also minimise condensation in cold weather.

3. For roofing, purlin/batten spacings should be no more than those shown in Table X - Maximum Purlin Spacings. For curved structures, the maximum purlin spacing should be 750mm and a minimum radius of 6000mm for Roma and Greca profile and 1400mm for Trimdek profile. For walls, noggings spacings should be no more than 1200mm. Use Laserlite® Noise Stop on all battens, purlins or noggings to minimise the noises associated with expansion and contraction.

Table X - Maximum Purlin Spacings

Profile	End Span	Mid Span
Roma	800mm	1000mm
Greca	900mm	1200mm
Trimdek	900mm	1200mm


4. Lay Laserlite® Noise Stop Tape to avoid creaking.

5. Lay Laserlite® Eave Infill strips at eaves to avoid rain, dust & wind entering the eaves.

6. For installations under a gutter, fit Metal back channel with Back channel infill strips prior to laying sheet.

step 2

Sheet & fixings

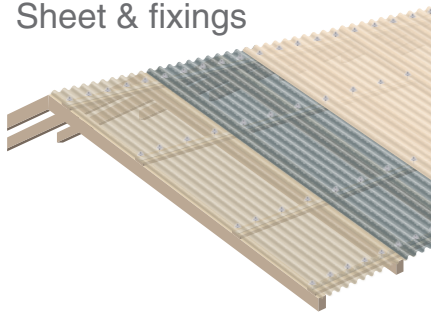


1. Ensure that the UV surface protected side faces the sun. This is the side of the label and the inkjet marking. When installed as a wall or fence it is recommended that the UV protected side is facing the most sun. The life of the sheet may be shortened and discolouration may occur due to the unprotected side being exposed to UV radiation.

2. The sheet can be easily cut with a pair of shears, a fine-toothed handsaw or a circular saw with a cut-off blade suitable for plastic.

3. For roof laying, start with the lower sheets first, keeping side laps away from prevailing wind. Allow an overhang of 50mm. Temperature changes will cause expansion and contraction, so make allowances for thermal movement. Resistance to movement can cause buckling.

4. Side laps will differ by profile. Install as shown below:

Table Y - Side laps

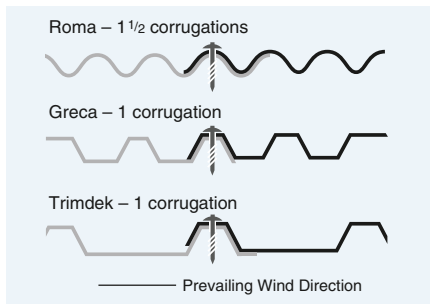

5. To ensure maximum performance of the sheet, and to avoid buckling, it is necessary to oversize the holes and centre the fixings. It is recommended that Laserlite® One Shot® fixings are used. They come complete with their own hole saw that cuts an expansion hole as you drill. The screw is centred every time and the cutter holds the plug of material removed. If using Laserlite® Standard Fixings, pre-drill your fixing holes. Use a 10mm drill for sheets up to 4.2mm long and a 12mm drill for sheets longer than 4.2mm. Fix the sheet through the centre of the pre-drilled holes, perpendicular to the purlins/battens. A (5/16") Drill hex driver bit should be used. Only tighten the fixings enough to prevent rattling. Over tightening may cause distortion and undue stress with possible failure resulting. Use only Laserlite® branded fixings as these are designed to be compatible with Laserlite® Polycarbonate Roofing. Any failure of the sheet due to fixings other than Laserlite branded will void the Laserlite® warranty. In normal conditions, use the fixing spacings shown in Table Z - Fixing spacings. As a guide, you will need approximately 7 fixings per lineal metre. This depends on your purlin spacings and wind conditions. In high wind areas fix Roma and Greca on every second corrugation on each purlin/batten. It is suggested that barge capping be used. Fix the sheet through the valleys for walls with Laserlite® Standard Fixings.

Table Z - Fixing Spacing


Profile	End Purlin	Mid Purlins
Roma	every 2nd crest	every 3rd crest
Greca	every 2nd crest	every 3rd crest
Trimdek	every crest	every crest

Using One Shot® fixings eliminates requirement for pre-drilling.

6. End overlaps should be 150mm for steep pitch or 200mm for shallow pitch.

step 3

Capping & flashings for various installations



APEX ROOF - Fit barge capping to edge of sheet and ridge capping to the apex. Secure using One Shot® screws



UNDER A GUTTER - Fit Back channel flashing with foam infill strips under gutter prior to laying sheets and Barge Capping to edge of sheet.



AGAINST A WALL/FASCIA - Fit barge capping to edge of sheet and apron flashing at the wall or fascia. Secure using One Shot® screws.

Safety Recommendations

- Always exercise extreme care when walking on a roof.
- Never walk on or apply your load directly to sheeting.
- In particular consider all safety requirements when working at heights above 2m.
- For safety reasons we recommend the use of safety mesh for installations above 3m.
- Use appropriate personal protective equipment (PPE) such as safety footwear, glasses & gloves.
- All safety practices must comply with the applicable local building and/or work cover code(s).
- We do not recommend the collection of drinking water from any roof without appropriate precautions and filtration. Check with your local water authority for further advice.

CAUTION:

To maximise the life cycle of your Laserlite® roofing. Laserlite® recommends avoiding exposure of polycarbonate sheeting to excess heat from patio heaters. Maintain a distance of 1 metre minimum between the sheets and the heater with adequate ventilation at all times and temperature to below 90°C beneath the sheeting. If the temperature rises above 90°C, remove the heater immediately.



• **Lifetime Warranty** against loss of light transmission. Laserlite® sheeting is now guaranteed not to lose more than 10% of light transmission in the first 15 years, and thereafter no more than 1% per year* for the commercial life of the product.

*When measured in accordance with ASTM D 1003-07e1.

• **10 year Warranty against Weather Breakeage**

In addition, Laserlite® polycarbonate roofing will resist damage from hail measuring up to 25mm for a period of 10 years.



Colours depicted in this brochure are representations offered only as a guide and should not form the basis of a colour selection. Slight colour variation may occur between production runs. Transmitted light and colour may vary in intensity depending on weather conditions. The information contained in this brochure is to the best of our knowledge accurate, but all recommendations are made without any warranty whatsoever, since the conditions of use are beyond our control. This brochure cancels and supersedes all previous published information. The company reserves the right to alter and revise, without notice, the information contained herein. © Registered trademark of Bayer, Germany.